

# RockGrip™

## Anchoring System For SuperTie™ and SuperTie-CR™


RockGrip is a mechanical anchoring system to allow single sided forming with SuperTie fiberglass formtie systems (with smooth rod). Anchors are available for both Light (6000 pound ultimate tensile strength) and Medium (15,000 pound ultimate tensile strength).



- Easy to use
- No waiting for epoxy to cure
- Less expensive than alternative systems
  - Requires less anchor depth
  - eliminates plugging and patching

### Now available for coil threaded rod...

Using our extensive experience in the art of grasping cylindrical fiberglass rod, RJD has developed an anchoring system specifically designed for use with our fiberglass coil rod (SuperTie-CR), but tests have shown it to be effective for use with steel coil rod systems as well.

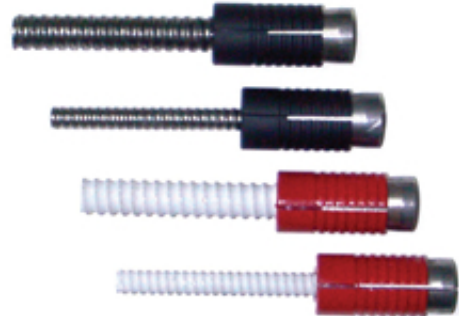

Anchor	Coil Rod Diameter	Hole Diameter	SWL with FRP Coil Rod (hole depth)	SWL with Steel Coil Rod (hole depth)
RGCR750	3/4"	1.25"	6000 lbs (3.5")	14000 lbs (6")
RGCR500	1/2"	1.25"	4500 lbs (3.5")	8000 lbs (4")

Note: Safe Working Loads In Pounds at 2:1 Safety Factor

RGF/SCR 2.0 05/07

14540 – 115 Avenue  
Edmonton, Alberta, Canada T5M 3B9

 **FRP Distributors** INC  
Sustainable Concrete Solutions